



8" COMBINATION CURB & GUTTER

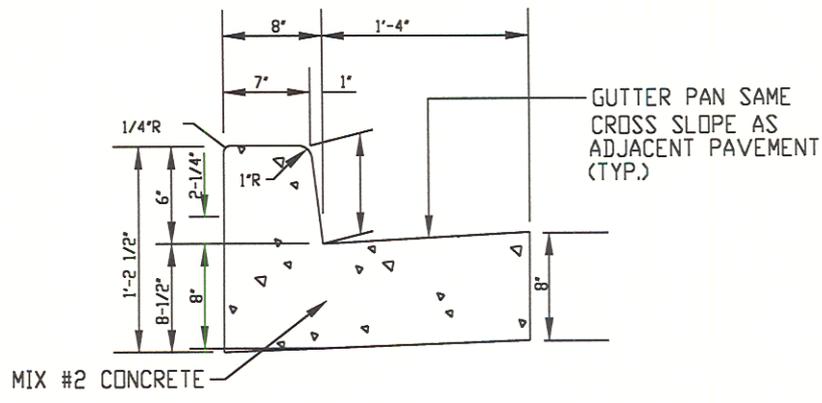

6" COMBINATION CURB & GUTTER

NOTE:
 MODIFIED COMBINATION CURB
 AND GUTTER TO BE USED ONLY
 ON LOCAL ROADS OR MINOR
 COLLECTOR ROADS.

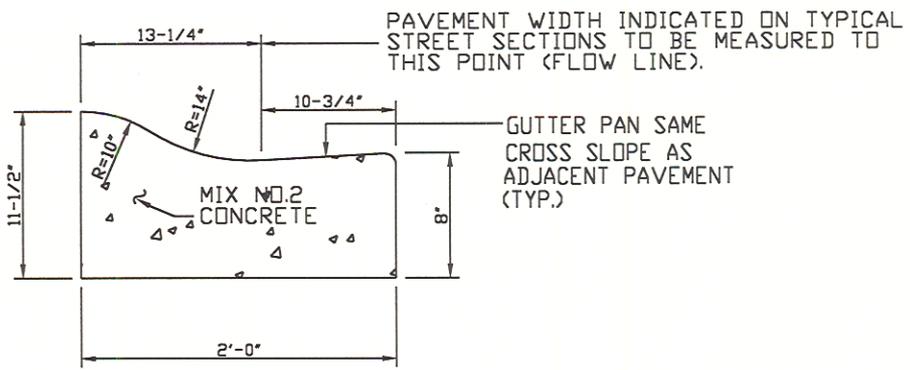

MODIFIED COMBINATION CURB & GUTTER

NOTES:

1. MAX JOINT SPACING FOR CONCRETE CURB AND COMBINATION CURB & GUTTER - 10'
2. SEE SPECIFICATIONS FOR LOCATION AND DESCRIPTION OF TREATMENT FOR THE TYPES OF JOINTS USED.
3. 6" AND MODIFIED COMBINATION CURB AND GUTTER TO BE USED ONLY ON LOCAL ROADS OR MINOR COLLECTOR ROADS.

CHARLES COUNTY GOVERNMENT
 DEPARTMENT OF PLANNING & GROWTH MANAGEMENT
 APPROVED: *[Signature]* 11/19/99
 CHIEF OF DEVELOPMENT & CAPITAL SERVICES DATE
[Signature] 11/19/99
 HIGHWAY ENGINEER DATE

STANDARD DETAIL
 COMBINATION
 CURB & GUTTER

REVISIONS:	
	R 2.22